


Lugano

Wallmount hood



Learn
more

MEASUREMENTS

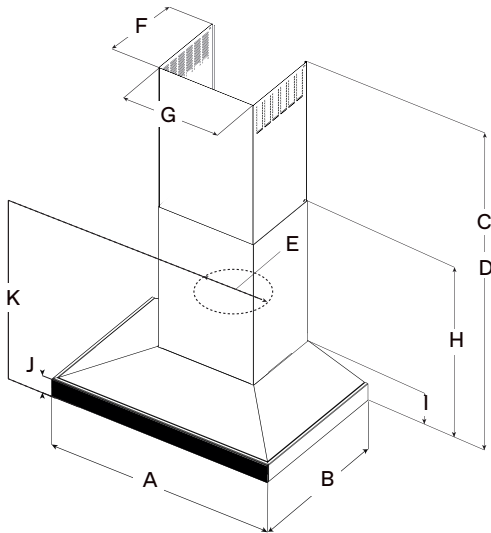

	ELG630S3	ELG636S3
A	30" (76.2 cm)	36" (91.4 cm)
B	19 7/8" (50.5 cm)	
C*	Max: 42 1/4" (107.3 cm) Min: 28 13/16" (71.8 cm)	
D**	Max: 38 1/4" (98.2 cm) Min: 24 5/8" (62.5 cm)	
E	6" (15.2 cm)	
F	10 3/4" (26.8 cm)	
G	13" (33.1 cm)	
H	23 1/4" (60.8 cm)	
I	4 9/16" (12.56 cm)	
J	2 3/8" (6 cm)	
K	18 1/8" (47.1 cm)	

*Ductless (recirculating)
** Ducted version

DESCRIPTION

The pairing of glass and brilliant stainless steel makes Lugano ideal for any kitchen, blending perfectly with other appliances. Perimeter Aspiration technology helps achieve top performance by delivering more powerful and efficient fume extraction while reducing noise. Available in 30" and 36" widths, Lugano includes a powerful 600 CFM blower, dimmable LED lighting, and glass capacitive touch controls.



FEATURES

- 🔊 Hush system
- 💡 Dim light
- ⚙️ Top performance
- 👆 Touch controls
- 🌀 Perimeter aspiration
- 💡 Led light
- 🌀 CFM reduction system



GENERAL PROPERTIES

Width	30"	36"
Model	ELG630S3	ELG636S3
Dimensions	30"W x 19 7/8"D x min:24 5/8" max:42 1/4"H	36"W x 19 7/8"D x min:24 5/8" max:42 1/4"H
Blower Type (Internal) ¹	600 CFM (3-speed + boost)	
Noise (Min-max sones) ¹	1.3-6.8 Sones	
Electrical	120V-60Hz,450W	120V-60Hz,495W
Illumination	2 premium dimmable LED, 2.1W, 4000K	
Finish	Stainless Steel with black tempered glass	
Controls	Multi-function Electronic with black glass touch display	
Grease filters	Dishwasher-Safe, anodized aluminum, mesh filter + perimeter aspiration	
Installation type	Ducted or recirculating with kit (sold separately)	
Telescopic chimney	Can reach ceiling heights of min 7'0", max 9'2" (ducted out) & min 7'5", max 9'6" (recirculating)	
Duct transition	Round 6" top discharge (top)	

KITS

Recirculating Kit	KIT0141925 (Contains 6" deflector, 4 round carbon filters & clips)
Chimney Extension	KIT02785 (Can reach 8'8" - 12'4" (ducted), 9'0"-12'8" (recirculating)) KIT01935 (Can reach 7'9" - 10'9" (ducted), 8'1"-11'1" (recirculating))

WARRANTY:² Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com



The product images shown are for illustration purposes only and may not be an exact representation of the product.

¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.