# Como

## Wallmount hood

Learn more

## MEASUREMENTS

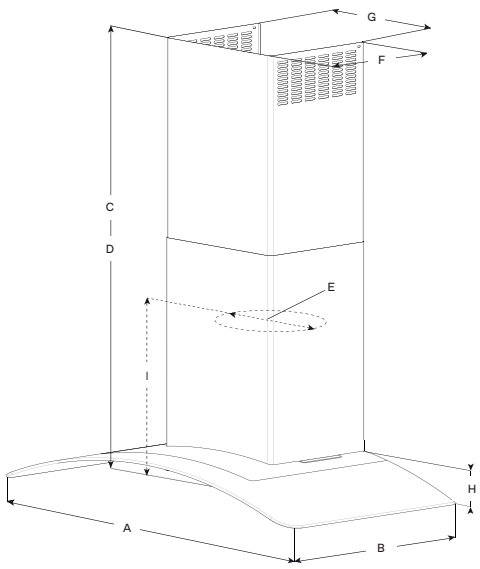


| | ECM630S3 | ECM636S3 |
|---|---|---|
| A | 30” (76.2 cm) | 36” (91.4 cm) |
| B | 19 11/16” (50.6 cm) | |
| C* | Max: 54 1/6” (137.6 cm)<br>Min: 33 5/8” (84.7 cm) | |
| D** | Max: 50 5/16” (127.8 cm)<br>Min: 29 11/16” (75.4 cm) | |
| E | 6” (15.24 cm) | |
| F | 10 3/4” (27.3 cm) | |
| G | 13” (33.1 cm) | |
| H | 3 7/16” (9.4 cm) | |
| I | 12 7/8” (30.9cm) | |

*Ductless (recirculating)
**Ducted version

## DESCRIPTION

Como combines arched glass wings and stainless steel to create a light and airy environment, making it the perfect centerpiece for any contemporary kitchen. This gently flowing design is powered by a 600 CFM blower that can handle the demands of today’s cooktops. Como is equipped with glass touch controls, dimmable LED lighting, and a dishwasher-safe stainless steel microhole filter. Designed for standard ducted installation, Como can also be installed as a recirculating system using the optional recirculating kit.

## FEATURES

- Hush system
- Dim light
- Top performance
- Touch controls
- CFM reduction system
- Led light

## GENERAL PROPERTIES

| | | |
|---|---|---|
| Width | 30” | 36” |
| Model | ECM630S3 | ECM636S3 |
| Dimensions | 30”W x 19 $^{11}/_{16}$”D x min 29 $^{11}/_{16}$” max 54 $^{1}/_{6}$”H | 42”W x 25 $^{1}/_{4}$”D x min 29 $^{11}/_{16}$” max 54 $^{1}/_{6}$”H |
| Blower Type (Internal)[1] | 600 CFM (3-speed + boost) | |
| Noise (Min-max sones)[1] | 1.7-6.8 Sones | |
| Electrical | 120V-60Hz,395W | |
| Illumination | 2 premium dimmable LED, 2.1W, 4000K | |
| Finish | Stainless Steel with black tempered glass | |
| Controls | Multi-function Electronic with black glass touch display | |
| Grease filters | Stainless steel microhole filter | |
| Installation type | Ducted or recirculating with kit (sold separately) | |
| Telescopic chimney | Can reach ceiling heights of min 7’6”, max 10’2” (ducted out) & min 7’10”, max 10’5” (recirculating) | |
| Duct transition | Round 6” (Top Only) | |

## KITS

| | |
|---|---|
| Chimney Extension | KIT0100315 (Can reach 8’5” - 12’1” (ducted), 9’1”-12’5” (recirculating)) |
| Recirculating Kit | KIT02721 (Contains 6" Deflector and 2 Round Carbon Filters) |

**WARRANTY:[2]** **Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com**

The product images shown are for illustration purposes only and may not be an exact representation of the product.
[1] CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.
[2] For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.