


# Nemi

## Undercabinet hood



Learn  
more

### MEASUREMENTS

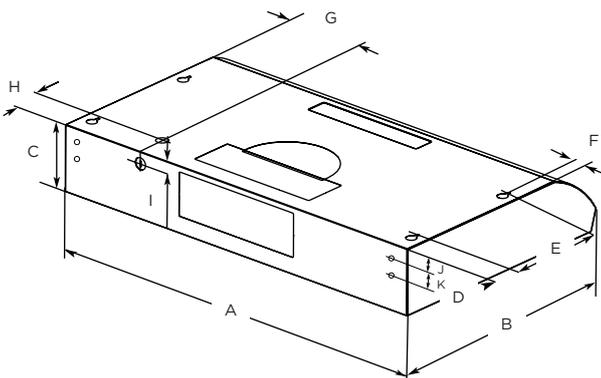

|   | ENM230S1                                    | ENM236S1      |
|---|---|---------------|
| A | 30" (76.2 cm)                               | 36" (91.4 cm) |
| B | 18 <sup>5</sup> / <sub>8</sub> " (47.3 cm)  |               |
| C | 4 <sup>15</sup> / <sub>16</sub> " (12.5 cm) |               |
| D | 1 <sup>1</sup> / <sub>2</sub> " (3.8 cm)    |               |
| E | 9" (22.9 cm)                                |               |
| F | 1" (2.5 cm)                                 |               |
| G | 6 <sup>9</sup> / <sub>16</sub> " (16.7 cm)  |               |
| H | 1 <sup>15</sup> / <sub>16</sub> " (5 cm)    |               |
| I | 7 <sup>7</sup> / <sub>8</sub> " (2.2 cm)    |               |
| J | 1 <sup>1</sup> / <sub>8</sub> " (2.6 cm)    |               |
| K | 1 <sup>1</sup> / <sub>8</sub> " (3.6 cm)    |               |

### DESCRIPTION

Nemi sports a slender 5" height and soft curves, designed to modernize and perfectly fit kitchens where space is premium. Nemi features a 3-speed, 280 CFM internal blower, which provides sufficient ventilating power for most kitchens. The backlit push button controls allow for easy adjustment of blower speeds and dual LED lamps. A single dishwasher-safe anodized aluminum mesh filter is easy to clean. Available in 30" or 36" widths, Nemi is designed for standard ducted installation and can be installed as a recirculating system, using the Recirculating Kit, available as an accessory.



### FEATURES

-  3x layer mesh
-  Led light



#### GENERAL PROPERTIES

|  |  |                       |
|--|--|-----------------------|
| Width                                  | 30"  | 36"                   |
| Model                                  | ENM230S1   | ENM236S1              |
| Dimensions                             | 30"W x 18 5/8"D x 5"H                                      | 36"W x 18 5/8"D x 5"H |
| Blower Type <sup>1</sup><br>(Internal) | 280 CFM (3-speed)  |                       |
| Noise<br>(Min-max sones) <sup>1</sup>  | 1.3-4.9 Sones  |                       |
| Electrical                             | 120V-60Hz, 115W  |                       |
| Illumination                           | 2 LED, 2.1W, 4000K, 235 Lumen                              |                       |
| Finish                                 | Stainless Steel  |                       |
| Controls                               | Backlit electronic push buttons                            |                       |
| Filters                                | Dishwasher-safe, anodized aluminum mesh filter             |                       |
| Installation type                      | Ducted or recirculating wit kit (sold separately)          |                       |
| Duct transition                        | 3 1/4" x 10" (top or rear), or 7" round (sound separately) |                       |

#### KITS

|                   |                     |
|-------------------|---------------------|
| Recirculating kit | KIT0140997          |
| Backdraft damper  | KIT02723 (7" round) |
| Duct transition   | KIT02722 (7" round) |

**WARRANTY:<sup>2</sup> Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com**



The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.