

Leone


Wallmount hood

Specification sheet



Learn
more

MEASUREMENTS

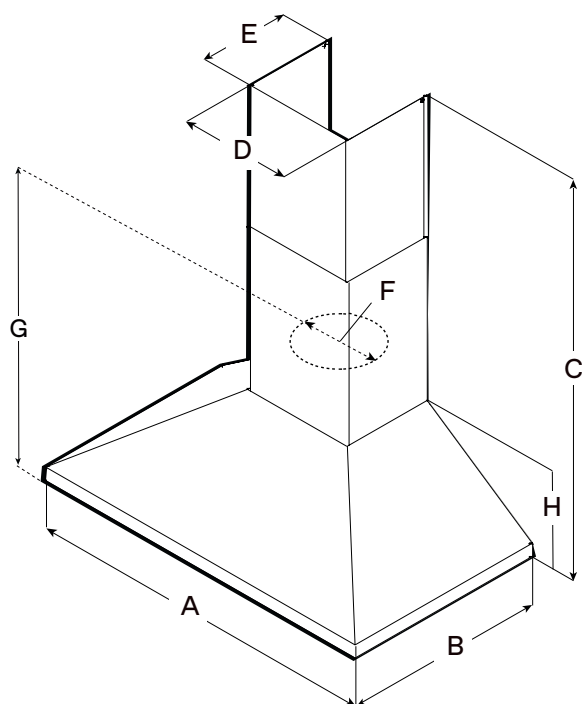

| | ELN630S2 | ELN636SS* ELN136S2** | ELN142S2 | ELN148SS |
|---|---|---------------------------------|----------------|----------------|
| A | 30" (76 cm) | 36" (91.4 cm) | 42" (106.7 cm) | 48" (121.9 cm) |
| B | 24" (61 cm) | | | |
| C | Max: 47 5/8" (121.6 cm) Min: 30" (76.2 cm) | | | |
| D | 13 1/8" (33.2 cm) | | | |
| E | 10 5/8" (27 cm) | | | |
| F | 6" (15.2 cm) | 6" (15.2 cm)* 8" (20.3 cm)** | 8" (20.3 cm) | 8" (20.3 cm) |
| G | 16 7/8" (42.9 cm) | | | |
| H | 12 3/16" (12.2 cm) | | | |

DESCRIPTION






Give a splash of Italian design to your professional kitchen with Leone's crisp lines, seamless welded corner craftsmanship, beveled rim and gleaming stainless steel.

Leone has the extra depth (24") and power (1200 CFM on 36", 42" & 48" W) & 36" in 600 CFM needed to support professional ranges and cooktops. No ear plugs required with Leone's HUSH sound suppression system, which enables you to comfortably talk and entertain, even when cooking up a storm.

Available in 30", 36" and 42" widths, Leone features backlit hidden knob controls which operate the 4-speed blower and LED lighting.



FEATURES

-  Hush system
-  Heat guard
-  Professional performance
-  Grease collectors
-  Seamless look



GENERAL PROPERTIES

| Width | 30" | 36" | 42" | 48" |
|--|--|--|--|--|
| Model | ELN630S2 | ELN636SS* ELN136S2** | ELN142S2 | ELN148SS |
| Dimensions | 30"Wx24"Dxmin30"max47 ⁵ / ₈ "H | 36"Wx24"Dxmin30"max47 ⁵ / ₈ "H | 42"Wx24"Dxmin30"max47 ⁵ / ₈ "H | 48"Wx24"Dxmin30"max47 ⁵ / ₈ "H |
| Blower Type ¹ (Internal) | 600 CFM (4-speed) | 600 CFM (4-speed)* 1200 CFM (4-speed)** | 1200 CFM (4-speed) | 1200 CFM (4-speed) |
| Noise (Min-max sones) ¹ | 1.7-7.0 Sones | 1.7-7.0 Sones* 1.7-8.5 Sones** | 1.7-8.5 Sones | 1.7-8.5 Sones |
| Electrical | 120V-60Hz,463W* | 120V-60Hz,490W* 120V-60Hz,913W** | 120V-60Hz,913W | 120V-60Hz,913W |
| Illumination | 2 LED Lights, 6.5W, 3000K, 540 Lumen/Lamp | | | |
| Finish | Stainless Steel | | | |
| Controls | Fully Retractable Rotating Knobs with Blue backlighting | | | |
| Grease filters | Dishwasher-Safe, Professional Stainless Steel Baffle | | | |
| Installation type | Ducted or recirculating with Kit | | | |
| Telescopic chimney | For ceiling heights 7'6"-10'0" (over electric cooking),8'0"-10'0" (over gas cooking) | | | |
| Duct transition | 6" Round with Backdraft Damper (Top Only) | 6"/8" Round with Backdraft Damper (Top Only) | 8" Round with Backdraft Damper (Top Only) | 8" Round with Backdraft Damper (Top Only) |

KITS

| | |
|---------------------------------|---|
| Long Chimney Ext | KIT02785 (can reach up to 13"), KIT01935 (can reach up to 11") |
| External Blower | KIT0153054 (1200 CFM blower, 8" or 10" compatible) |
| Inline Blower | KIT0154387 (1200 CFM blower, 8" or 10" compatible) |
| Inline Blower Shell (1200 CFM) | KIT0179549 (for use with 1200 CFM blower, 8" or 10" compatible) |
| Inline Blower Shell (600 CFM) | KIT0205342 (for use with 600 CFM blower, 6" compatible) |
| External Blower Shell | KIT0179547 (for use with 1200 CFM blowers only) |
| Recirculation (600 CFM) | KIT0192767 (6" round deflector) + KIT0192765 (4 round carbon filters) + KIT01936 (Duct Cover w/grates) |
| Recirculation (1200 CFM) | KIT0192759 (8" round deflector) + KIT0192765 (4 round carbon filters) + KIT01936 (Duct Cover w/grates) |
| Electronic CFM Reduction Bypass | KIT0185752 (Achieves <300 CFM for 600 CFM Blower) KIT0185099 (Achieves <400 CFM for 1200 CFM Blower) |

WARRANTY:² Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com



The product images shown are for illustration purposes only and may not be an exact representation of the product.

¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.