


# Varna

## Wallmount hood



Learn more

### MEASUREMENTS

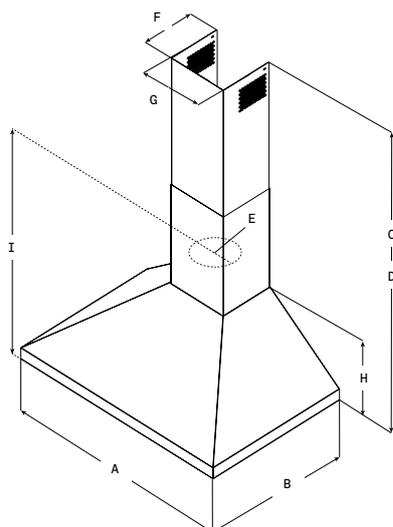

	EVR630S2	EVR636S2
A	30" (76.2 cm)	36" (91.4 cm)
B	19 7/8" (50.4 cm)	
C*	Min: 28 3/8" (72 cm) Max: 42 1/8" (107 cm)	
D**	Min: 28 3/8" (72 cm) Max: 38 3/8" (97 cm)	
E	6" (15.2 cm)	
F	7 3/16" (18.3 cm)	
G	8 3/16" (20.8 cm)	
H	9 7/8" (25 cm)	
I	14 5/8" (37.1 cm)	

\*Ductless version (recirculating)

\*\*Ducted version

### DESCRIPTION

The clean lines, beautiful sloping angles, and stainless steel finish of Varna make a striking visual statement. Available in 30" and 36" widths, Varna features a powerful 600 CFM blower, dimmable LED lighting, a dishwasher-safe stainless steel microhole filter, and easy-to-use glass capacitive touch controls for convenience and safety. Designed for standard ducted installation, Varna can also be installed as a recirculating system using the optional kit.



### FEATURES

- ✎ Touch controls
- 🔇 Hush system
- ⚙️ Top performance
- 💡 Dim light
- 🌀 CFM reduction system
- 💡 Led light



### GENERAL PROPERTIES

Width	30"	36"
Model	EVR630S2	EVR636S2
Dimensions	30"W x 19 7/16"D x min 28 3/8" max 42 1/8"H	36"W x 19 7/16"D x min 28 3/8" max 42 1/8"H
Blower Type (Internal) <sup>1</sup>	600 CFM (3-speed + boost)	
Noise (Min-max sones) <sup>1</sup>	0.4-5.2 Sones	
Electrical	120V-60Hz, 455W	
Illumination	2 premium dimmable LED, 2.1W, 4000K	
Finish	Stainless Steel with black tempered glass	
Controls	Multi-function Electronic with black glass touch display	
Grease filters	Dishwasher-Safe, Stainless steel microhole filter	
Installation type	Ducted or recirculating with kit (sold separately)	
Duct transition	Round 6" top discharge	
Telescopic chimney	Can reach ceiling heights of min 7'5", max 9'2" (ducted) & min 7'5", max 9'6" (recirculating)	

### KITS

Recirculating Kit	KIT02766 (Contains 6" deflector & 2 carbon filters)
Long chimney extension	KIT02762 (Can reach 8'5"-11'3" (ducted), 8'6"-11'7" (recirculating))

**WARRANTY:<sup>2</sup> Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com**



The product images shown are for illustration purposes only and may not be an exact representation of the product.  
<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.