

Nikolatesla flux


Downdraft induction cooktop

Specification sheet



Learn more

MEASUREMENTS

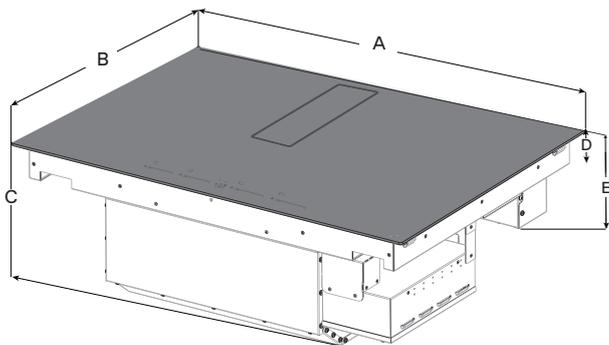


	ENF430BL	ENF436BL
A	30 ⁵ / ₁₆ " (77.05 cm)	36" (91.54 cm)
B	22 ⁹ / ₁₆ " (56.4 cm)	
C	10 ³ / ₁₆ " (25.9 cm)	
D	2 ⁹ / ₁₆ " (6.4 cm)	
E	6 ¹³ / ₁₆ " (17.29 cm)	

DESCRIPTION

Discover the future of efficient and safe cooking with Nikolatesla FLUX.

Induction technology that redefines your cooking experience. With an integrated aspiration system equipped with a powerful central fan of 600 CFM, it can reach very high performance levels in terms of air capture, noise level, and energy efficiency. Perfect to compliment any kitchen design, Nikolatesla Flux is available in 30" & 36" widths.

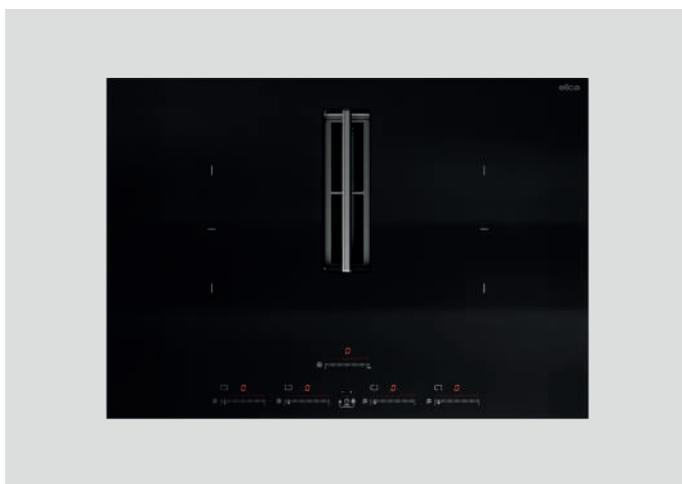

FEATURES

- Timer
- Child lock
- Pot self-detection
- Easy to maintain
- Stop and go
- Delay switch off
- CFM reduction system
- Temperature manager
- Long life filter ++
- Bridge zones
- Total integration
- Airmatic
- Touch controls



GENERAL PROPERTIES

Width	30"	36"
Model	ENF430BL	ENF436BL
Dimensions	30"W x 22 9/16"D x 10 3/16"H	36"W x 22 9/16"D x 10 3/16"H
Electrical	220V-60Hz, 7.7Kw, 34.5A	
Finish	Tempered, ultra deep black ceramic glass	
Controls	Electronic glass touch & slide w/red illumination	
Installation type	Ducted out or recirculating w/kit	
Ventilation ¹	4 speed (3 speed + boost)	
Blower Type (Internal)	600 CFM	
Noise (Min-max sones) ¹	1.5-6.8 Sones	
Grease filter	4 layer, black anodized aluminum mesh grease filter	
Cooking zones	4 Cooking Zones (3.7 kW) - 7 1/2" x 7.9"	
Heating type	Induction	
Heating level	10 levels (9 + boost, see details in chart below)	

KITS

Recirculating	KIT0192385 (2 ceramic carbon filters)
---------------	---------------------------------------


WARRANTY:² Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com

Cooking level	Power (W)
Level 1	63 W
Level 2	105 W
Level 3	168 W
Level 4	252 W
Level 5	378 W
Level 6	588 W
Level 7	882 W
Level 8	1344 W
Level 9	2100 W
Booster	3700 W

Glass specifications


Material	Glass ceramic cooking panel
Appearance	Deep-black color
Thickness	4 mm
Color in reflexion	Black
Color in transmission	Amber
Surface structure	Though crystal smooth scratch & stain-resistant

SELF RIMMING INSTALLATION

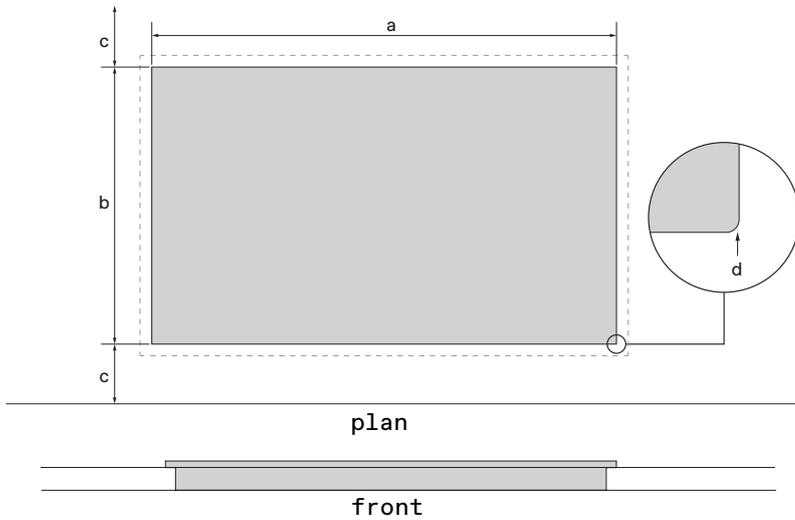

	ENF430BL	ENF436BL
a	28 3/4" (73.03 cm)	34 9/16" (87.7 cm)
b	21 1/8" (53.6 cm)	
c	2" (5 cm) min	
d	1 5/16" (5 cm)	

FLUSH MOUNTED INSTALLATION

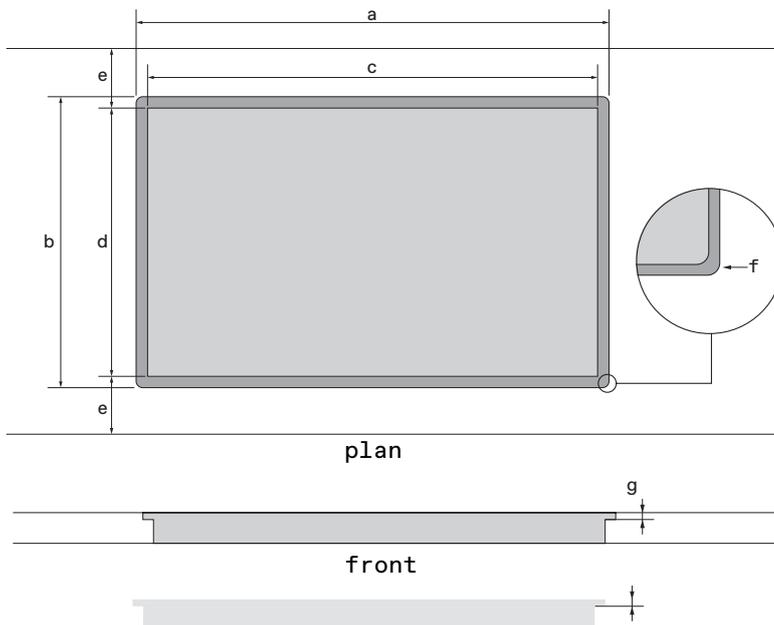

	ENF430BL	ENF436BL
a	30 7/16" (77.35 cm)	36 1/8" (91.8 cm)
b	22" (56.76 cm)	
c	28 3/4" (73.03 cm)	34 9/16" (87.7 cm)
d	21 1/8" (53.65 cm)	
e	1 5/16" (5 cm) min	
f	4 x Ø7	
g	1/4" (0.63 cm)	



The product images shown are for illustration purposes only and may not be an exact representation of the product.

¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.


² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.

Nikolatesla flux

Downdraft induction cooktop

Specification sheet

MEASUREMENTS

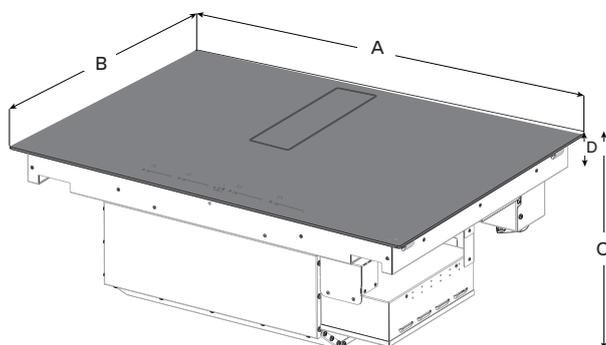


	ENF430BL	ENF436BL
A	30" (76 cm)	36" (91.54 cm)
B	22 9/16" (56.4 cm)	
C	10 3/16" (25.9 cm)	
D	2 9/16" (6.4 cm)	

DESCRIPTION

Discover the future of efficient and safe cooking with Nikolatesla FLUX.


Induction technology that redefines your cooking experience. With an integrated aspiration system equipped with a powerful central fan of 600 CFM, it can reach very high performance levels in terms of air capture, noise level, and energy efficiency. Perfect to compliment any kitchen design, Nikola Tesla Flux is available in 30" & 36" widths.

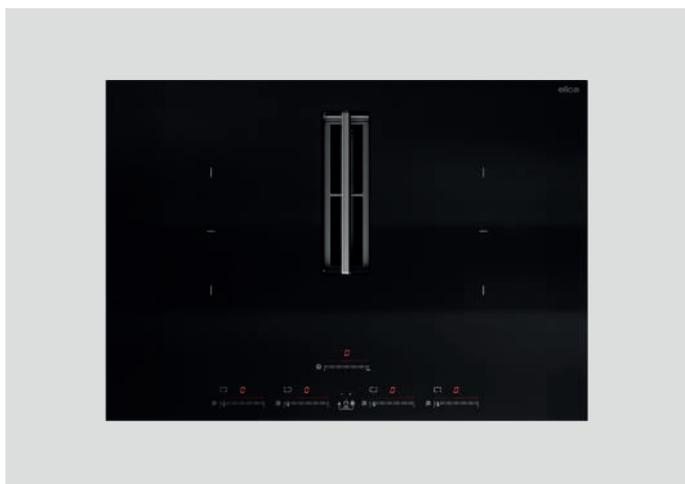

Learn more


INSTALLATION

SELF RIMMING INSTALLATION

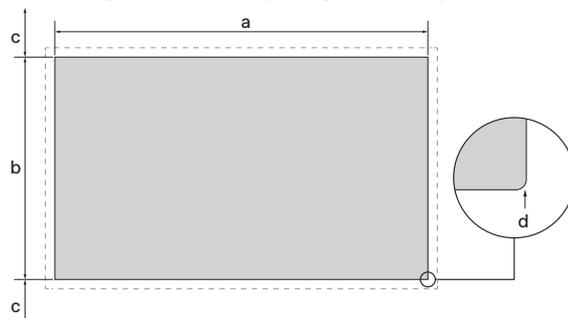

	ENF430BL	ENF436BL
a	28 3/4" (73.03 cm)	34 9/16" (87.7 cm)
b	21 1/8" (53.6 cm)	
c	2" (5 cm) min	
d	1 15/16" (5 cm)	

FLUSH MOUNTED INSTALLATION

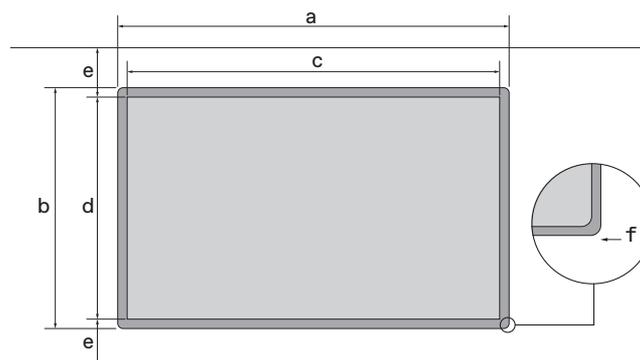

	ENF430BL	ENF436BL
a	30 7/16" (77.35 cm)	36 1/8" (91.8 cm)
b	22" (56.76 cm)	
c	28 3/4" (73.03 cm)	34 9/16" (87.7 cm)
d	21 1/8" (53.65 cm)	
e	1 15/16" (5 cm) min	
f	4 x Ø7	
g	1/4" (0.63 cm)	

FEATURES

- Timer
- Child lock
- Pot self-detection
- Easy to maintain
- Stop and go
- Delay switch off
- Temperature manager
- Long life filter ++
- Bridge zones
- Total integration
- Airmatic
- Touch controls
- CFM reduction system



GENERAL PROPERTIES

Width	30"	36"
Model	ENF430BL	ENF436BL
Dimensions	30"Wx22 9/16"Dx10 3/16"H	36"Wx23"Dx11 1/32"H
Electrical	220V-60Hz, 7.7Kw, 34.5A	
Finish	Tempered, ultra deep black ceramic glass	
Controls	Electronic glass touch & slide w/red illumination	
Installation type	Ducted out or recirculating w/kit	
Ventilation**	4 speed (3 speed + boost)	
Blower Type (Internal)	600 CFM	
Noise (Min-max sones)*	1.5-6.8 Sones	
Grease filter	4 layer, black anodized aluminum mesh grease filter	
Cooking zones	4 Cooking Zones (3.7 kW)- 7 1/2" x 8 1/4"	
Heating type	Induction	
Heating level	10 levels (9 + boost, see details in chart below)	

KITS

Recirculating	KIT0192385 (2 ceramic carbon filters)
---------------	---------------------------------------

WARRANTY:* Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com**

Cooking level	Power (W)
Level 1	63 W
Level 2	105 W
Level 3	168 W
Level 4	252 W
Level 5	378 W
Level 6	588 W
Level 7	882 W
Level 8	1344 W
Level 9	2100 W
Booster	3700 W

Glass specifications

Material	Glass ceramic cooking panel
Appearance	Deep-black color
Thickness	4 mm
Color in reflexion	Black
Color in transmission	Amber
Surface structure	Though crystal smooth scratch & stain-resistant



* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** CFM and Noise data indicates the performance of the hood blower tested in an open setting with 0.5 static pressure. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

*** For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.