




Selected Model	
Model number	EMG642S1
Exterior Appearance	
Color	Stainless Steel
Stainless Steel grade	430
Features	
Controls	Multi-Function Electronic with black glass touch display
Illumination	4 2.5W LED, 1 intensity (bulbs included)
Blower Type	4-speed, 600 CFM
Blower Performance	Speed 1, 160 CFM, 1.7 Sones Speed 2, 280 CFM, 3 Sones Speed 3, 470 CFM, 5 Sones Speed 4, 600 CFM 6 Sones
Filter Type	Dishwasher-Safe, Stainless Steel Micro Hole Filters (X3)
Ducting	Ducted or Recirculating Installation (Recirculating Kit Sold Separately)
Duct transition	6" Round with Back Draft Damper (top)
Chimney (ducted out)	For ceiling height from 7'6" à 9'9"
Chimney (recirculating)	For ceiling height from 7'6" à 10'2"
Special features	Hush Silence System
Electrical Requirements	
Electrical requirements	120V-60 HZ / 455 Watt à 3.8 Amps
Accessories (optionnal)	
Extension Chimney Kit (ducted out)	KIT0100317   for ceiling height from 8'9" à 12'8" (with appropriate accessories))
Extension Chimney Kit (recirculating)	KIT0100317   For ceiling height from 9'2" to 12'9" (with appropriate accessories))
Recirculating Kit	KIT02665 (Fot 36" & 42", contains 6"/8" deflectors & 2 round carbon filters
Warranty	
Complete 2 years warranty	Entire Appliance; In-Home; Parts & Labour

## Dimensions

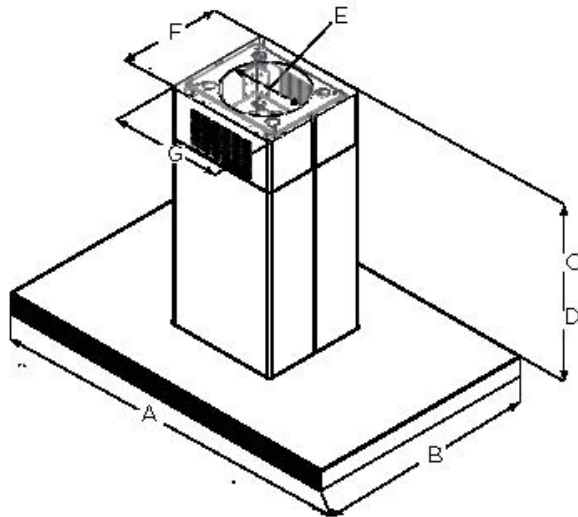


	EMG636S1	EMG642S1
A	36" (91.4 cm)	42" (106.7cm)
B	27 1/8" (68.9 cm)	
C*	Min: 29 13/16" (75.72cm) Max: 50 1/8" (127.32cm)	
D**	Min: 45" (114.5 cm) Max: 50 1/8" (127.32 cm)	
E	6" (15.9 cm)	
F	12" (30.4cm)	
G	13" (33.24cm)	

\* Ductless (Recirculating) version

\*\* Ducted version


## Installation

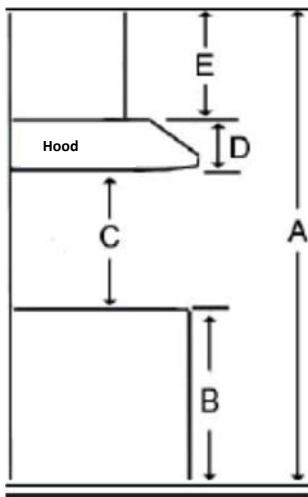

A	Floor to ceiling height	variable
B	Floor to counter top height (standard)	36"
C	Recommended height between cooking surface and bottom of the hood	28 to 30"
D	Hood height	
E	Chimney height	29 13/16" to 50 1/2"

## Duct transition

6" round top



*The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.*